



L.T.F

Dimmable Low Voltage LED Driver - CLASS 2

40W DA40W1280C15320C-0000 120V
Constant Current / Constant Voltage



Efficiency	higher than 85%
Power Factor	>95%
Case TC	90C° Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP 60, 65, 67
Class	Class 2 Power Supply
Dimming	ELV & Triac Dimmable
Optional Dim.	0-10V



Intertek



RoHS



FCC Part 15
Class B compliant



* Ask for more Information

FEATURES

- Isolated output power per NEC and UL safety requirements
- UL and ETL recognized/ Listed, UL 8750, 1310
- Auto-reset ; Short circuit, Overload and Thermal protection
- Dimmable with ELV and Triac type dimmers
- Aluminum casing for optimal heat dissipation
- Low profile, small form factor, junction box mountable
- Flicker free dimming and excellent dimming range
- Class 2 power supply and other than Class 2 options
- Efficient, high power factor, low THD, FCC compliant

ELECTRICAL SPECIFICATIONS


Constant Current					
Model #	Input Voltage	Input Current	Output Voltage	Output Current	Available Form Factors
DA40W1280C	120V AC 50/60Hz	0.33 A	31.3V DC	1280 mA	F3

Dimmable Low Voltage LED Driver - CLASS 2 - DA40W



MECHANICAL SPECS.

F3

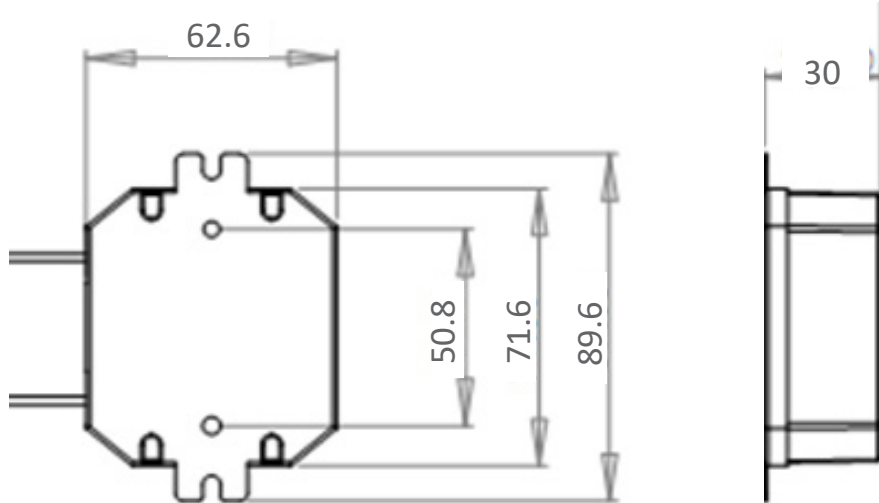

* Aluminum Enclosure