

DA12W350C1834D010-0014
Constant Current



Efficiency	>85%
Power Factor	>0.90
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP 67
Class	Class 2 Power Supply
Dimming	ELV, TRIAC, 0-10V
Output Voltage or Constant Current	350mA



- Isolated output power per NEC and UL safety requirements
- UL recognized/Listed, UL8750, 1310
- Auto-reset; Short circuit, overload and thermal protection
- ELV, TRIAC & 0-10V Dimmable




FEATURES

- Aluminum casing for optimal heat dissipation
- Low profile, small form factor, junction box mountable
- Flicker free dimming and excellent dimming range
- Class 2 power supply and other than Class 2 options
- Efficient, high power factor, low THD, FCC compliant

MODEL SPECIFICATIONS

CONSTANT CURRENT					
Model Number	Input Voltage	Wattage	Output Voltage	Output Current	Available Form Factor
DA12W350C1834D010-0014	120V AC 50/60Hz	12W	18V - 34V DC	350mA	B4

DIMMING CURVES

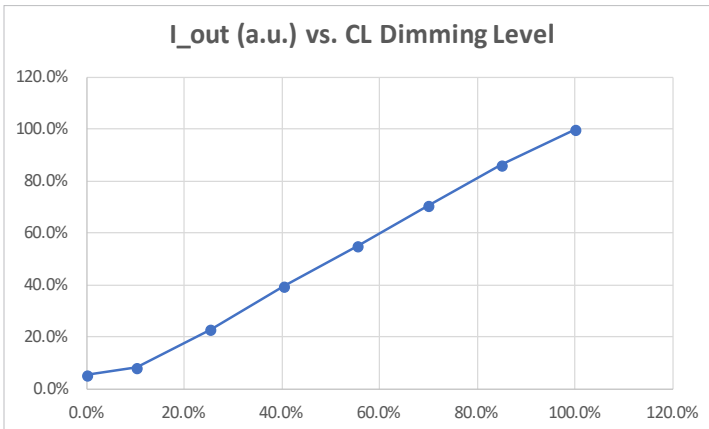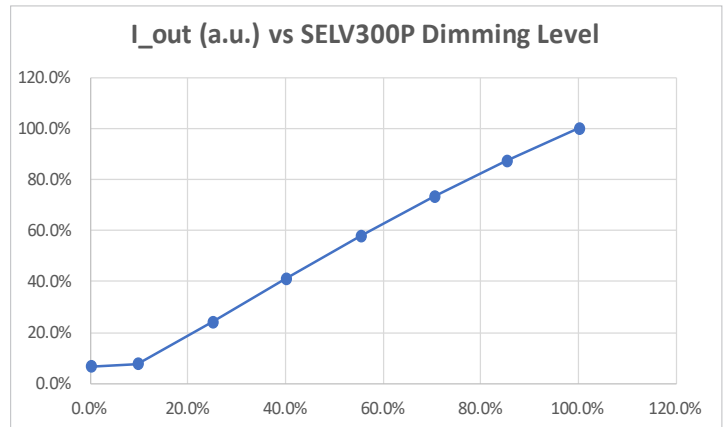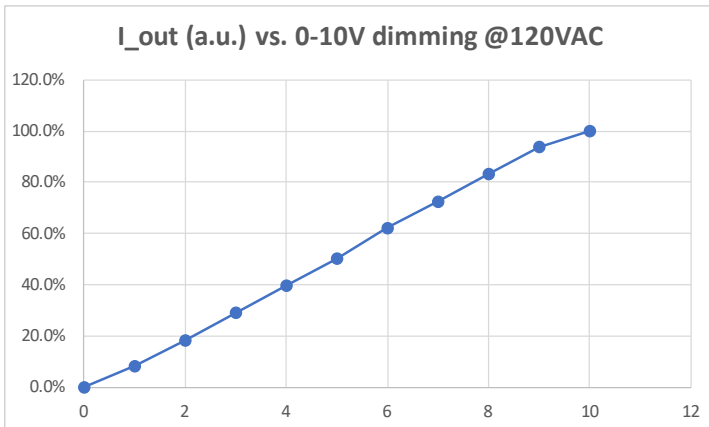

MECHANICAL SPECS

FORM FACTOR	DIMENSIONS
B4	67.5 x 33 x 21mm

